

## SELFPWH Series Brief Introduce

SELFPWH Series Wall Mounted ESS (energy storage system) is a LiFePO4 battery Pack ideal for new installation of household energy storage. It's stores energy for Solar Power System or Back up Power System. It ranges from 25.6V/48.0V/51.2V and is available in 50Ah to 320Ah capacities. It's rechargeable lithium-ion battery pack. It has a longer cycle life and higher energy density than traditional lead-acid batteries. The compact design allows for easy installation and space-saving. The battery is suitable for off-grid and on-grid solar PV systems, residential and commercial energy storage, and backup power supply. It's one of the best replacement for Tesla PowerWall.

Long Life

Lithium Iron Phosphate


Deep Cycle



## Applications

- BTS Stations, Telecom System
- Internet data center(IDC)
- Solar Energy/Off-Grid System
- Access net work system
- UPS System, EPS System
- Terminal of FTTX
- Indoor distribution system

## Dimensions & Weight

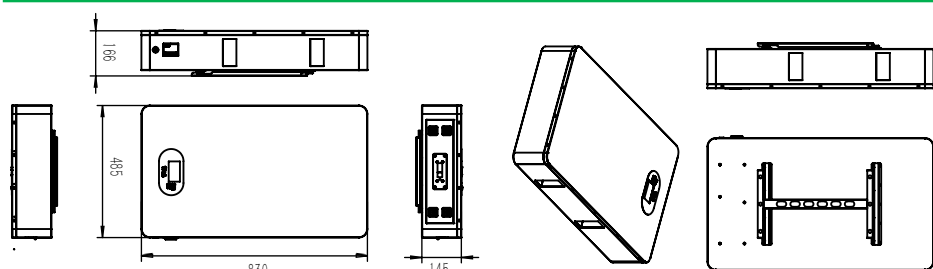

Length: 830±1mm | Width: 485±1mm | Height: 145±1mm | Weight: 90.0±0.1kgs

## Technical Specifications

<b>Electrical Characteristics</b>	Nominal Voltage	51.2V
	Nominal Capacity	200Ah
	Energy	10240Wh
	BMS with internal cell balancing	YES
	Cycle Life	≥6000cycles @ 80%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100%@0.2C
	Efficiency of Discharge	96~99%@0.5C
<b>Standard Charge</b>	Charge Voltage	57.6V±0.2
	Charge Mode	0.5C to 57.6V, then 57.6V, charge current to 0.02C(CC/CV)
	Charge Current	100A
	Max. Charge Current	200A
	Charge Cut-off Voltage	57.6V±0.2
<b>Standard Discharge</b>	Continuous Current	100A
	Max continuous discharge current	200A
	Discharge Cut-off Voltage	43.2V±0.1
<b>Environmental</b>	Charge Temperature	0℃ to 45℃ (32F to 113F) @60±25% Relative Humidity
	Discharge Temperature	-20℃ to 60℃ (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	0℃ to 40℃ (32F to 104F) @60±25% Relative Humidity
	Water Dust Resistance	IP21
<b>Mechanical</b>	Cell & Method	Prismatic Cell, 16S2P
	Case	Iron
	Dimensions (in./mm.)	830*485*145mm/32.69*19.1*5.71Ins
	Weight (lbs./kg.)	Approx: 90kgs/198.39lbs
	Gravimetric specific energy	113.78WH/KG
	Protocol (optional)	ModBus: CAN/RS485/RS232(OPT)
	SOC (optional)	LCD
	Bluetooth	YES

Inverters Support Brands: GROWATT solis PYLONTECH MEGAREVO STUDEER Volttronic Power MUST美世乐 victron energy GOODWE


SACOLAR KSTAR科士达 invt英威腾 Schneider Electric Deye 德业 爱阳储能 I YANG SOFAR SOLAR LU POWERTEK FOX ESS SMA SRNE

## BMS Specifications


- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Cell Voltage balance function
- Short detection function

## Performance Characteristic (Data test from 16 Series Cell)


### Different Rate Discharge Curve (25°C)

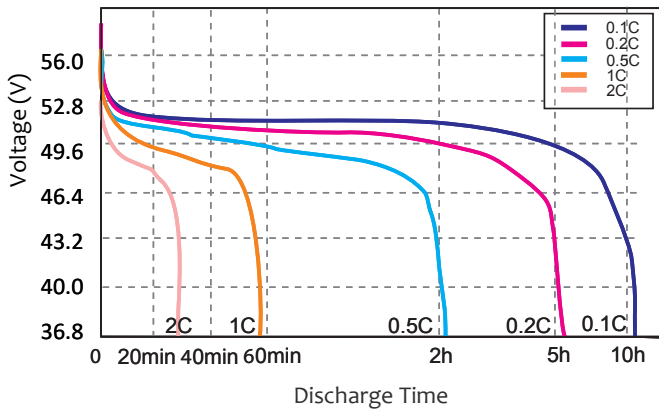


### Different Temperature Discharge Curve At 0.5c

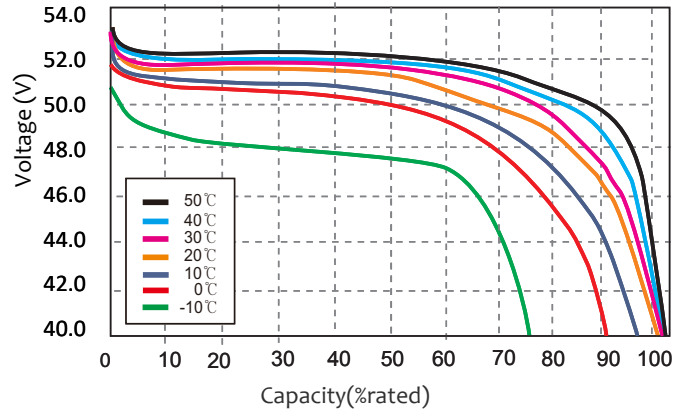


### State Of Charge Curve At 0.5c (25°C)

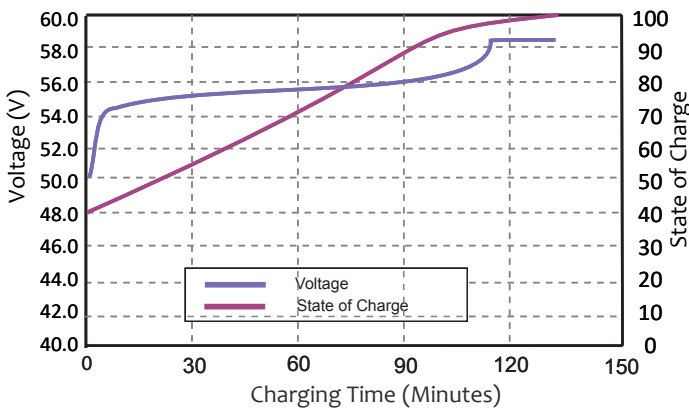


### Charging Characteristics At 0.5c (25°C)

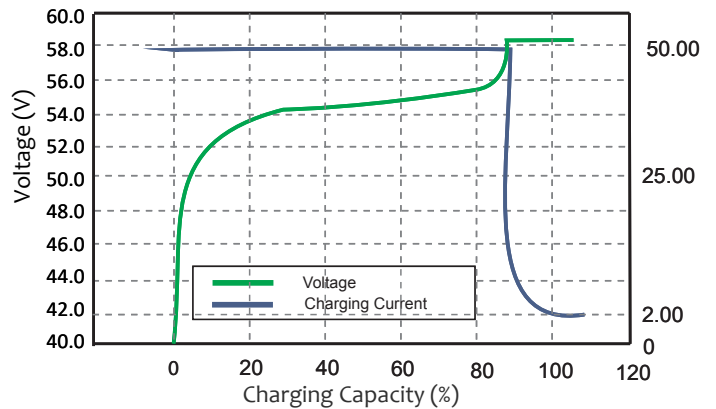

### Cycle Life Curve At 1c According DoD

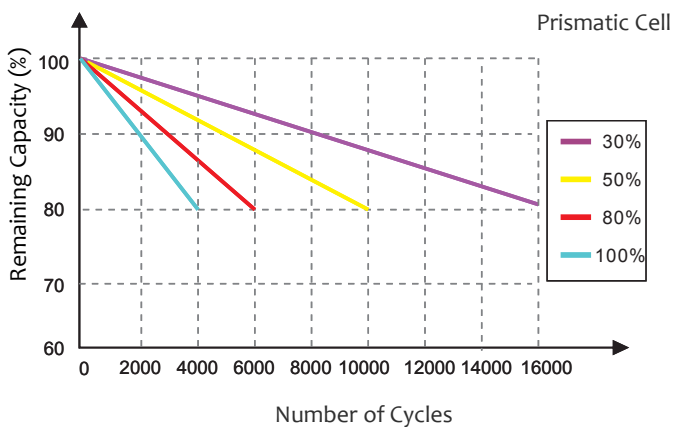

### Self Discharge Characteristics Curve

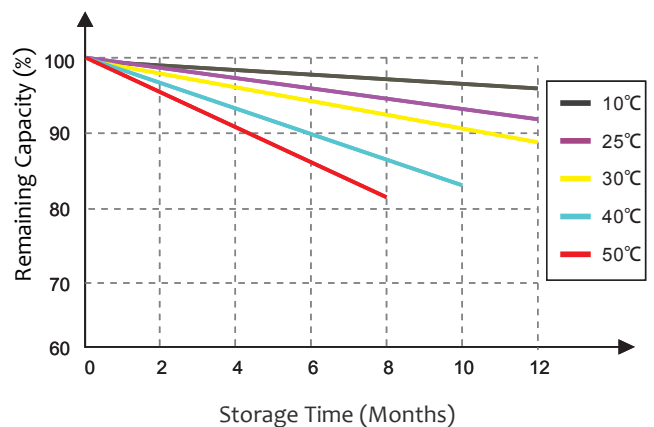

**Note:** All above information shall be changed without prior notice, SE.GREEN reserves the right to explain and update the latest information. Welcome inquiry us!  
**SAFETY WARNING :** Use only within the allowed parameters. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. Do not use the battery if you suspect it may be faulty or damaged.